

Lot #9

MANUFACTURER	American Road Machinery
COMPANY	Goodyear Street & Highway Supply Co.
SERIAL	WD80079-3469101
MODEL	ALC-25
TYPE	Leaf Collector (25 yd)
DATE PURCHASED	8-22-89
COST	\$17,261.00 + Hydraulic Boom = <u>\$18,666.00</u>
WEIGHT	GVWR
ENGINE	TYPE Hercules - Diesel
SIZE	4 Cylinder
TRANSMISSION	
TIRES	7.00 x 15LT
WHEEL BASE	
DEPRECIATION	YEARS
R-61-89 - Leaf Collector	

Revised
12-29-93

American Road Machinery, Inc.

401 BRIDGE STREET

MINERVA, OHIO 44657

TELEPHONE (216) 868-7724

FAX (216) 868-3386

SOLD TO

Goodyear Street & Highway
P.O. Box 1295
Cuyahoga Falls, OH 44223

SHIP TO

CUSTOMER PICK-UP

(CITY OF TALLMADGE)

SALES ORDER

JUN 9 1989

ORDER DATE 6/09/89
OUR ORDER NO. 37844

DEALER CODE NO.	PROD. CODE	DEALER ORDER NO.	F.O.B.	MINERVA, OHIO	TERMS
		VERRAL			2% 10 DAYS - NET 30 DAYS
CUST. DELIVERY DATE 220. 221-MAILED SHIPPING DATE		SHIPPING INSTRUCTIONS			
DATE SHIPPED		SHIPPED VIA		CUSTOMER PICK-UP	CAR NO.
QUANTITY		DRAWING NUMBER OR PART NUMBER		DESCRIPTION	UNIT PRICE
ITEM NO.	ORDERS SHIPPED	BACK ORDERED			AMOUNT

1)	4	4	ALC-25 TM	Trailer Mtd. Leaf Collector	
2)	4	4	D-2300	Hercules Diesel Engine	
3)	4	4	A-200-274-P16-17-18	Safety Gauges	
4)	4	4	A-200-274-P21	Hour Meter	
5)	4	4	A-200-274-P19	Tachometer	
6)	4	4		Yellow Strobe Light	
7)	1	1		Spare Tire & Wheel	
8)	4	4	D-815-659	Extra 16" x 10' Hose	

NET TOTAL:


Shipped 8-22-89
WD-80089-3469097-R64
WD-80099-3467362-R63
WD-80109-3467354-R62

Thank you

8-22-89
WCP

RECEIVED
AUG 22 1989
ROAD DEPT.

25 YD. LEAF COLLECTOR

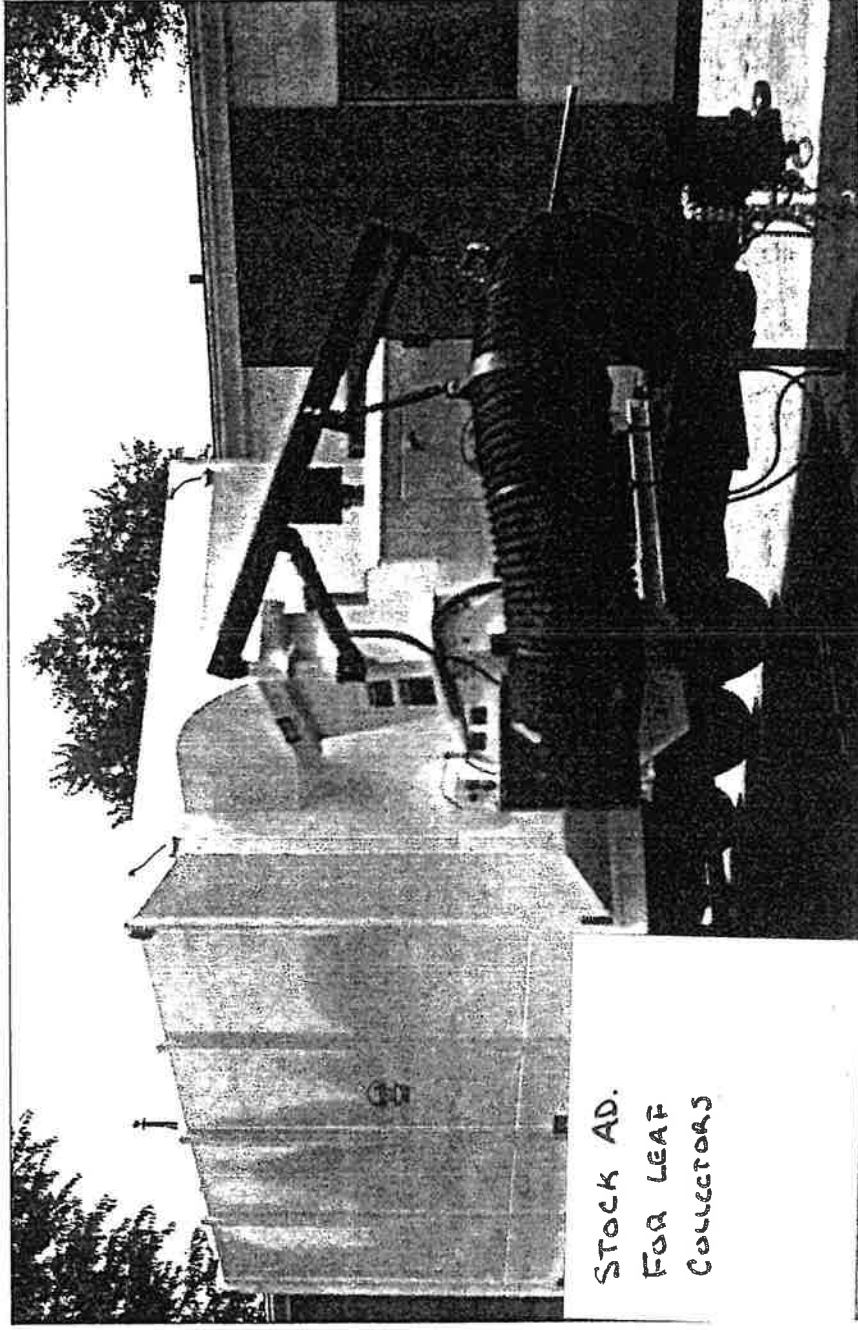

STOCK AD.
FOR LEAF
COLLECTORS

Note: Photograph may show extra-cost options.

FEATURES

- 1 Completely self contained with 25 Cu. Yd. hopper. One person operation.
- 2 68 H.P. high torque, water cooled gasoline engine removes wet and matted leaves @ 2600 RPM, dry leaves @ 2000 RPM or less.
- 3 Direct drive thru heavy duty P.T.O. with over-center clutch eliminates troublesome belt adjustment and maintenance. Clutch protects engine from starting and material shock loads.
- 4 25" steel blower fan has six abrasion resistant blades, dynamically and statically balanced and stress relieved to reduce vibration and maintenance.
- 5 One piece, top hinged rear door - automatically opens and closes as hopper is raised or lowered thru two counter-balance springs.
- 6 Rugged, free swinging, adjustable, chain supported, hose boom with chain roller.
- 7 Telescopic dump hoist, front mounted-positive mechanical advantage.
- 8 Low fan tip to housing clearance.
- 9 Bogie type, single wheel, tri axle undercarriage with heavy duty springs. Electric brakes standard, with break-away switch.
- 10 Parking stand and safety chains are standard equipment on trailer models.

AMERICAN ROAD MACHINERY, INC.


MINERVA, OHIO 44657

VACUUM CATCH BASIN CLEANERS
LEAF & LITTER COLLECTORS



SNOW PLOWS AND HITCHES
ASPHALT SPREADERS SALT & CHIP SPREADERS

DESIGN FEATURES

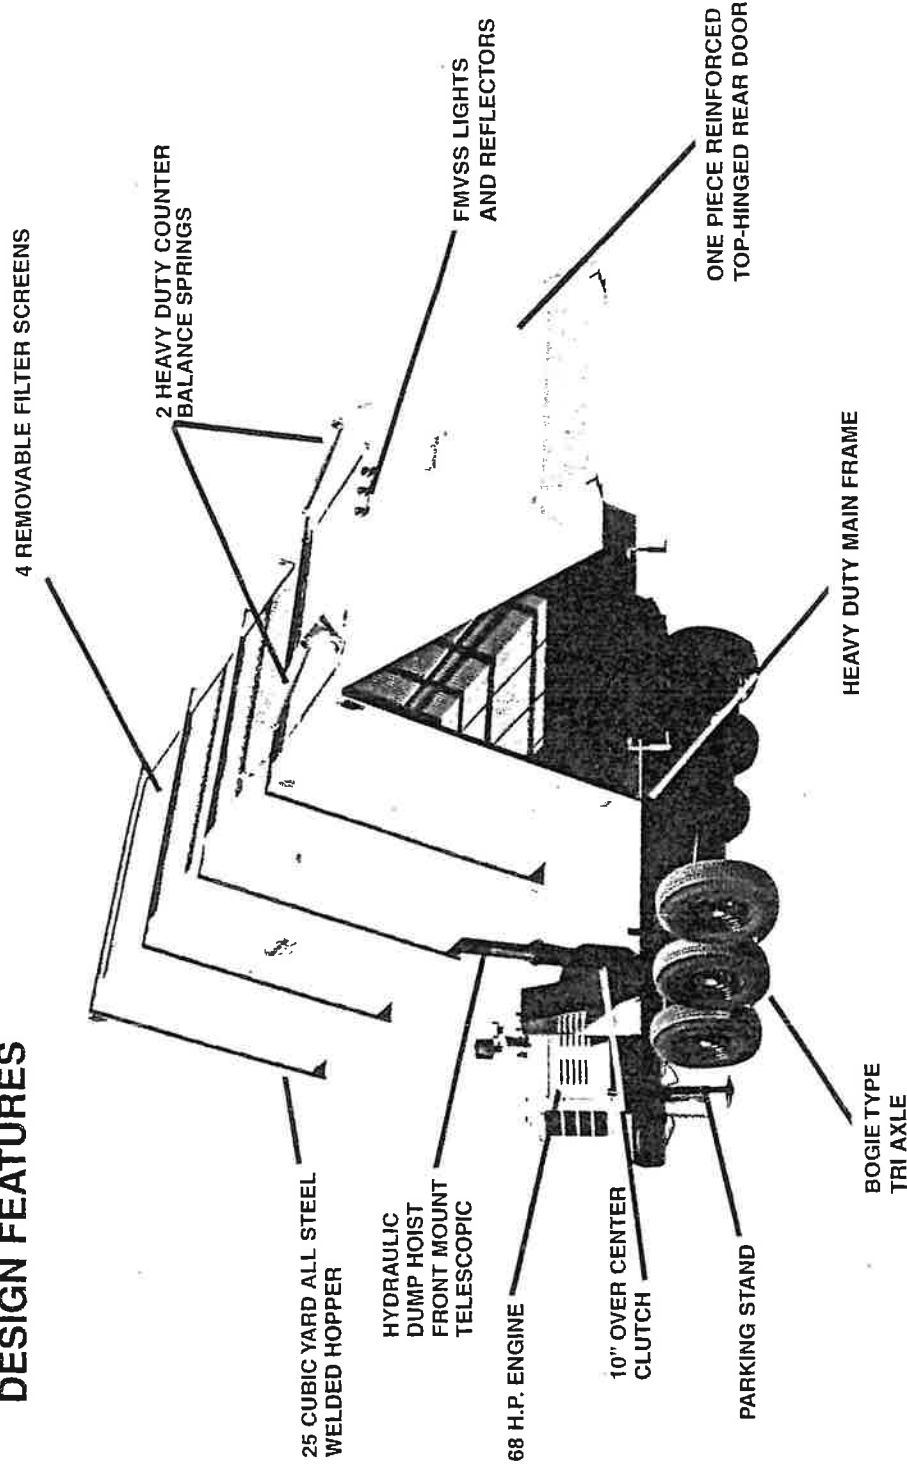

SPECIFICATIONS

ENGINE: 4 cylinder, high torque, water cooled 68 HP @ 2600 RPM (includes starter, battery, throttle, muffler, air cleaner, variable speed governor with control).

ENGINE GAUGES: Ammeter, oil pressure and water temperature.

POWER TAKE-OFF: Heavy duty 10" over-center clutch with 2-1/4" shaft.

FUEL TANK: 30 gallon capacity.

WEIGHT: Trailer unit with hose pickup - 7400 lbs. Chassis mounted unit with hose pickup - 6500 lbs.

TIRES: Six

TRI-AXLES: 3" Diameter tubular alloy 21000# capacity.

SPRINGS: Six leaf springs rated 3500# each with swivel equalizer between the axles.

TRAILER MOUNTED OVERALL DIMENSIONS: Length, 275"; width, 94"; height, 112"

FOR CHASSIS MOUNTED: 228" length; width, 94"; height, 84".

SUCTION HOSS: 16" diameter x 10' long, heavy duty, rubber hose with wax blooming rubber liner to resist wear and build up of material, abrasive resistant cover, wire reinforced, weighing 7.5 lbs.

per foot, supported by free swinging boom, hose control handle assembly.

HOPPER: 12 gauge all welded steel construction with four 3" channels encircling the body, 25 cubic yard capacity, one piece counterbalance rear door with top hinges, hydraulic self dumping hopper.

VACUUM UNIT: Case is 32-3/8" high x 34-1/4" long x 10-1/2" wide made of 1/4" steel plate with two piece 1/4" steel plate replaceable liner.

BLOWER FAN: 25" diameter with six 3/8" steel blades and hard face welded tips, stress relieved and balanced.

MAIN FRAME: Main frame 34" wide, chassis mounted 210" trailer mounted 268" long made of 6" @ 13# per foot channel with cross braces and parking stand and tri-bogie axle assembly.

LIGHTS: Brake lights, turn signals with truck connector kit and side reflectors, clearance lights.

OPTIONAL EQUIPMENT: Safety gauges - hour meter - tachometer - amber rotating beacon - diesel engine - hydraulic hose boom - hinged radiator screen - strobe light - suction hose quick disconnect - hinged hose collar - special paint.

DISTRIBUTED BY

American Road Machinery, Inc.



401 BRIDGE STREET
MINERVA, OHIO 44657
TELEPHONE (330) 868-7724
FAX: (330) 868-3386