

Solid Door Reach-In Freezers

Model Numbers: F1R-1, F2R-1, F3R-1

Supera[®] Refrigeration

It's frustrating to pay more for features that should be standard. Supera[®] gets that and offers standard features like door locks, factory-installed casters and a 90° stay-open door for every refrigeration unit. See how Supera's simple solutions can enhance the cold storage options in your restaurant!

FEATURES

Easy-Access Doors

Keep your hands full without worrying about a door closing on you. Supera[®] Reach-In Freezers feature doors that lock into place when opened past 90°, perfect for loading products and searching deep within the confines of the freezer. When you're in a hurry, grabbing an ingredient in the middle of a rush, there's no risk of energy or temperature loss because the doors also feature a self-closing design when they are opened less than 90°.

Stainless Steel Inside & Out

Supera[®] Reach-In Freezers are built for foodservice professionals. The easy to clean and durable, all stainless steel construction is a testament to that. Stainless steel fronts and sides keep the freezers looking their best. Every Supera[®] Reach-In Freezer also features a wall-to-wall stainless steel interior made of 304 stainless steel for greater corrosion resistance and ease of cleaning.

Precision Refrigeration

The top-mounted compressor unit is monitored by a Dixell solid-state thermostat with a digital display that provides self-diagnostics and can be programmed for greater efficiency. This simple, high-tech solution gives owners an easy way to control and monitor their freezer, ensuring that the optimal temperature is always maintained.



F1R-1



F2R-1



F3R-1




Features at a Glance:

- Temperature range from -8°F to -2°F
- Solid-state Dixell thermostat with digital display
- Stainless steel exterior is attractive and durable
- Stainless steel interior cleans easily
- Recessed handles with ergonomic grip
- Includes factory-installed, heavy-duty shelves
- Self-closing doors remain open past 90°
- Four factory mounted casters
- Two front casters (4"D) are equipped with brakes
- Utilizes environmentally friendly R-404A refrigerant
- Shelves hold full-size sheet pans from front to back
- Energy-efficient polyurethane insulation
- Top-mounted compressor
- Removable door gaskets for easy maintenance
- Locks above doors for loss prevention
- Illuminated interior

Reach-In Freezers – Product Specifications

Model Numbers: F1R-1, F2R-1, F3R-1

Plan View

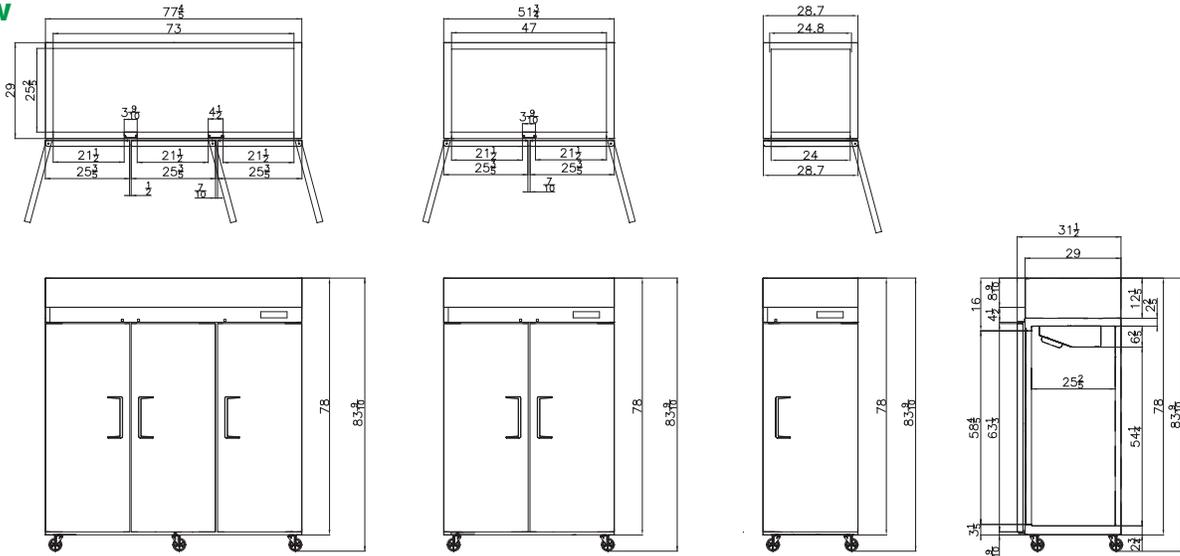

PRODUCT SPECIFICATIONS			
Model	F1R-1	F2R-1	F3R-1*
Dimensions	28.7"W x 33.3"D x 83.9"H	51.7"W x 33.3"D x 83.9"H	77.8"W x 33.3"D x 83.9"H
Shipping Dimensions	31"W x 35"D x 88"H	54"W x 35"D x 88"H	80"W x 35"D x 88"H
Capacity	22.6 Cu. Ft.	44.5 Cu. Ft.	69.2 Cu. Ft.
Inner Temperature	-8°F ~ -2°F / -22°C ~ -18°C		
Doors	1	2	3
# of Shelves	3	6	9
Refrigerant	R-404A		
Compressor HP	1/2	3/4	1-1/4
Cooling Type	Ventilated		
Insulation Type	Polyurethane		
Temperature Control Type	Dixell		
Amps(A) 115V/60Hz *208V-230V (F3R-1 only)	7.5	12	5.5/9.6*
Watts	540	900	1050
Net Weight	265 lbs	441 lbs	617 lbs