

Lot #

MANUFACTURER American Road Machinery
COMPANY Goodyear Street & Highway Supply Co.
SERIAL WD80049-3467366

MODEL ALC-25 **TYPE** Leaf Collector (25 Yd)
DATE PURCHASED 6-22-89

COST \$17,261.00 + Hydraulic Boom
WEIGHT #13,950.00

ENGINE GVWR
TYPE Hercules - Diesel
SIZE 4 Cylinder

TRANSMISSION

TIRES 7.00 x 15LT
WHEEL EAS

DEPRECIATION 3 YEARS

\$18,656.00

Revised
12-29-93

- R-60-89 - Leaf Collector

R-60

DELIVERY RECEIPT

DATE Sept 22 19 89
RECEIVED FROM

GOODYEAR STREET & HIGHWAY SUPPLY CO.
P.O. Box 1295 CUYAHOGA FALLS, OHIO 44223
TELEPHONE (216) 928-9126

The following articles in good order:

1 New American Road Machine
25 Leaf Collector with Disc
Exhauster, Safety Chain & Transport Tires
Covers, Shop Notes, Tool Kit, etc.
Yellow Street Light, Spare Tire
1 Wheel and Extra 16" x 10" tires
~~1~~ 18,000.00


P.D. # 13247

John Wooten

Addressed to City of Tallmadge
c/o Robert Rie
Tallmadge, Ohio 44278

Per RETAIN THIS SLIP TO COMPARE WITH INVOICE

25 YD. LEAF COLLECTOR

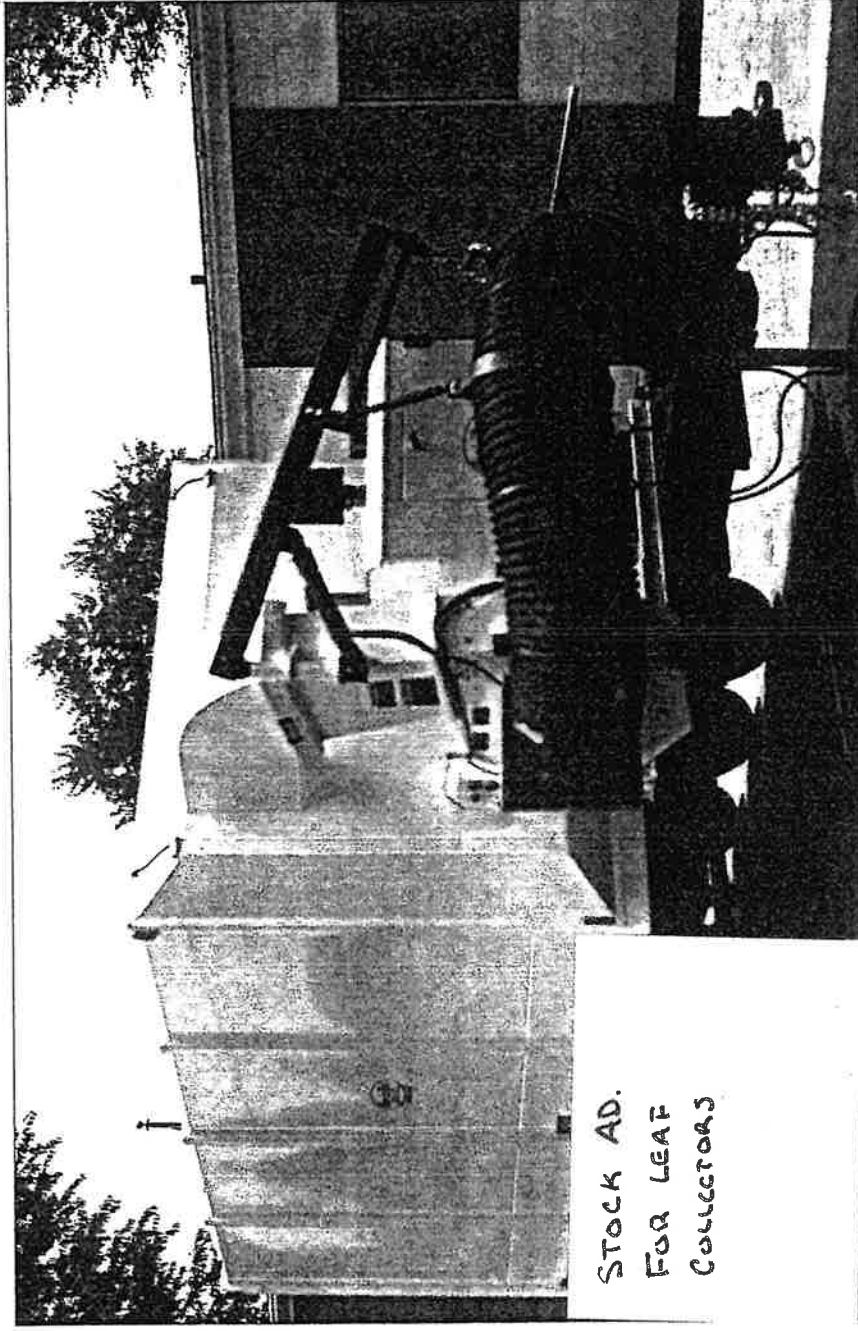

Note: Photograph may show extra-cost options.

FEATURES

- 1 Completely self contained with 25 Cu. Yd. hopper. One person operation.
- 2 68 H.P. high torque, water cooled gasoline engine removes wet and matted leaves @ 2600 RPM, dry leaves @ 2000 RPM or less.
- 3 Direct drive thru heavy duty P.T.O. with over-center clutch eliminates troublesome belt adjustment and maintenance. Clutch protects engine from starting and material shock loads.
- 4 25" steel blower fan has six abrasion resistant blades, dynamically and statically balanced and stress relieved to reduce vibration and maintenance.
- 5 One piece, top hinged rear door - automatically opens and closes as hopper is raised or lowered thru two counter-balance springs.
- 6 Rugged, free swinging, adjustable, chain supported, hose boom with chain roller.
- 7 Telescopic dump hoist, front mounted-positive mechanical advantage.
- 8 Low fan tip to housing clearance.
- 9 Bogie type, single wheel, tri axle undercarriage with heavy duty springs. Electric brakes standard, with break-away switch.
- 10 Parking stand and safety chains are standard equipment on trailer models.

AMERICAN ROAD MACHINERY, INC.


MINERVA, OHIO 44657

VACUUM CATCH BASIN CLEANERS
LEAF & LITTER COLLECTORS



SNOW PLOWS AND HITCHES
ASPHALT SPREADERS SALT & CHIP SPREADERS

DESIGN FEATURES

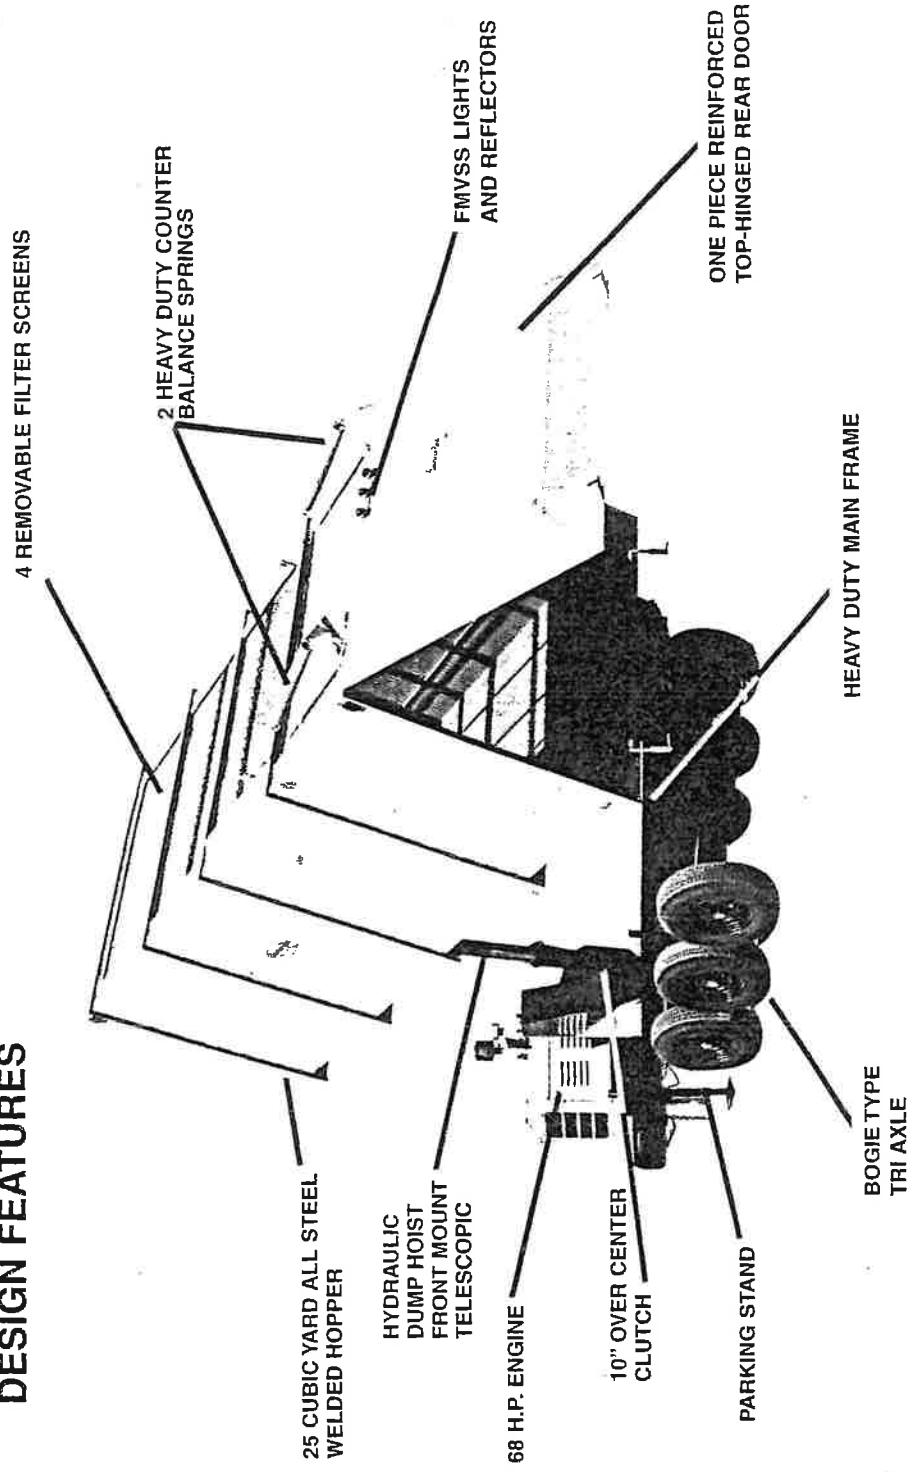

SPECIFICATIONS

ENGINE: 4 cylinder, high torque, water cooled 68 HP @ 2600 RPM (includes starter, battery, throttle, muffler, air cleaner, variable speed governor with control).

ENGINE GAUGES: Ammeter, oil pressure and water temperature.

POWER TAKE-OFF: Heavy duty 10" over-center clutch with 2-1/4" shaft.

FUEL TANK: 30 gallon capacity.

WEIGHT: Trailer unit with hose pickup - 7400 lbs. Chassis mounted unit with hose pickup - 6500 lbs.

TIRES: Six

TRI-AXLES: 3" Diameter tubular alloy 21000# capacity.

SPRINGS: Six leaf springs rated 3500# each with swivel equalizer between the axles.

TRAILER MOUNTED OVERALL DIMENSIONS: Length, 275"; width, 94"; height, 112"

FOR CHASSIS MOUNTED: 228" length; width, 94"; height, 84".

SUCTION HOSS: 16" diameter x 10' long, heavy duty, rubber hose with wax blooming rubber liner to resist wear and build up of material, abrasive resistant cover, wire reinforced, weighing 7.5 lbs.

per foot, supported by free swinging boom, hose control handle assembly.

HOPPER: 12 gauge all welded steel construction with four 3" channels encircling the body, 25 cubic yard capacity, one piece counterbalance rear door with top hinges, hydraulic self dumping hopper.

VACUUM UNIT: Case is 32-3/8" high x 34-1/4" long x 10-1/2" wide made of 1/4" steel plate with two piece 1/4" steel plate replaceable liner.

BLOWER FAN: 25" diameter with six 3/8" steel blades and hard face welded tips, stress relieved and balanced.

MAIN FRAME: Main frame 34" wide, chassis mounted 210" trailer mounted 268" long made of 6" @ 13# per foot channel with cross braces and parking stand and tri-bogie axle assembly.

LIGHTS: Brake lights, turn signals with truck connector kit and side reflectors, clearance lights.

OPTIONAL EQUIPMENT: Safety gauges - hour meter - tachometer - amber rotating beacon - diesel engine - hydraulic hose boom - hinged radiator screen - strobe light - suction hose quick disconnect - hinged hose collar - special paint.

DISTRIBUTED BY

American Road Machinery, Inc.



401 BRIDGE STREET
MINERVA, OHIO 44657
TELEPHONE (330) 868-7724
FAX: (330) 868-3386